



DOI: <http://dx.doi.org/10.1590/1807-1929/agriambi.v20n10p874-879>

Performance of evaporation estimation methods compared with standard 20 m² tank

Manoel C. M. Cabrera¹, Jamil A. A. Anache², Cristian Youlton³ & Edson Wendland²

¹ Universidade Estadual de Santa Cruz/Departamento de Ciências Exatas e Tecnológicas. Ilhéus, BA. E-mail: cabrera.uesc@gmail.com (Corresponding author)

² Universidade de São Paulo/Escola de Engenharia de São Carlos/Departamento de Hidráulica e Saneamento. São Carlos, SP. E-mail: anache.jamil@gmail.com; ew@sc.usp.br

³ Pontificia Universidad Católica de Valparaíso/Escuela de Agronomía. Quillota, Chile. E-mail: cristian.youlton@pucv.cl

Key words:

water resources
evaporimeters
free water surface
Penman

ABSTRACT

The low reliability of evaporation estimates in reservoirs challenges the management of water resources, especially when drought occurs. The evaporation rates measured in buried tanks (20 m² evaporimeters) are close to that of lakes. However, there are few studies in Brazil using long data sets with this type of tank. In this context, this study aimed to evaluate evaporation estimates of free water surface using the method of Penman (1948) and other five empirical equations in comparison with data from a 20 m² tank observed during 10 years. The annual relationship between rainfall and evaporation was 1.0, showing variations in dry years (0.7) and rainy years (1.3). Among all evaluated methods, Linacre (1993) shows the best performance. Camargo et al. (1999) has very good estimates using air temperature as input variable and is a simple and reliable alternative when data are missing.

Palavras-chave:

recursos hídricos
evaporímetros
superfície de água livre
Penman

Desempenho de métodos de estimativa da evaporação em comparação com tanque padrão de 20 m²

RESUMO

A baixa confiabilidade da quantificação da evaporação nos reservatórios desafia a gestão de recursos hídricos, principalmente em situações de escassez. A evaporação medida em tanques enterrados (evaporímetro de 20 m²) se aproxima à de lagos, porém existem poucos estudos no Brasil utilizando longas séries de dados com este tipo de tanque. Objetivou-se, neste trabalho, avaliar a estimativa de evaporação de superfície livre pelo método de Penman (1948) e outros cinco modelos (empíricos) em comparação com valores observados em um tanque de 20 m² durante dez anos. A relação anual entre a precipitação e a evaporação medida foi igual a 1,0, apresentando variações em anos secos (0,7) e chuvosos (1,3). Dentre os métodos de estimativa avaliados o método de Linacre (1993) apresenta o melhor desempenho enquanto o método de Camargo et al. (1999) apresenta desempenho muito bom e utiliza a temperatura do ar como variável de entrada sendo alternativa eficaz na ausência de dados.



INTRODUCTION

Water evaporation under natural conditions (E) is an important component in the hydrological cycle, since it represents approximately 63% of the total rainfall in the continents (Trenberth et al., 2011). Water surfaces significantly contribute to the return of the water to the atmosphere. In the Brazilian semi-arid region, studies quantifying evaporation in reservoirs are common, due to the situations of drought (Pereira et al., 2009; Leão et al., 2013).

In the period from 2012 to 2014, per year, 56 billion m³ of water were not replenished in the Southeast and 49 billion m³ in the Northeast (Getirana, 2015). Details of the drought in the Southeast region can be seen in Porto et al. (2014) and Coutinho et al. (2015). Studies quantifying evaporation are essential to Brazil. Evaporation is measured using tanks due to their easy handling (Kohler & Parmele, 1967). Evaporation in buried and large-surface tanks is close to that of lakes (Hounam, 1973).

In Brazil, there are six 20 m² evaporimeters; besides the tank of this research, two are located in São Paulo, two in Paraíba and one in Pernambuco (Leitão et al., 2007; Oliveira 2009). Studies with long data series using these tanks are rare and serve to assess or calibrate models and smaller evaporimeters (such as the Class A pan).

When there are no data of tanks, models that combine energy and aerodynamic balance, such as that of Penman (1948) and its simplifications, show good results for evaporation from data obtained above lawns in weather stations (Camargo & Sentelhas, 1997; Camargo & Camargo, 2000; Leitão et al., 2007; Oliveira, 2009; Pereira et al., 2009; Leão et al., 2013).

An analysis between the data obtained in the 20 m² tank with the method of Penman (1948) and its variations is necessary to identify which formulation is the most adequate in the management of water resources. The aim of this study was to evaluate the performance of the model of Camargo et al. (1999), methods of Penman (1948) and simplifications, compared with a standard tank (20 m²), in the high central region of São Paulo (Itirapina, SP) in a period of ten years (2003-2014).

MATERIAL AND METHODS

The study was carried out in Itirapina, SP, Brazil, at the Climatological Station of the Center of Water Resources and Applied Ecology (CRHEA) of the School of Engineering of São Carlos – University of São Paulo (22° 01' 22" S; 43° 57' 38" W; 733 m). The region has mean temperature and relative air humidity of 21.6 °C and 71%, respectively; the mean annual rainfall between 1979 and 2014 is 1486 mm. The data of evaporation were collected in a buried tank, with diameter of 5 m and depth of 2 m (20 m²).

The water level in the tank was measured with micrometric screw. The daily evaporation in the tank (E₂₀) results from the difference between subsequent readings corrected with the rainfall measured with a Ville de Paris pluviometer. Failures occurred in 16% of the days, due to the overflow of the tank.

Thus, the failures were filled with the mean evaporation of the previous and subsequent days, according to Collischonn & Tucci (2014).

The utilized meteorological data were: air temperature (t_a), relative humidity (RH), hours of insolation (n) and wind speed (U₂), collected at a height of 1.5 to 2.0 m above the grassed surface (Table 1).

For temperature, the monthly mean was calculated with the daily values; for E₂₀ and rainfall, monthly accumulations were also calculated.

Methods of Penman (1948) and Kohler & Parmele (1967)

Using the relationship between the flux of sensible and latent heat and the evaporating power of the air, Penman (1948) elaborated the method without the need for measurements at two levels above the soil, of temperature and humidity. These measurements at two levels do not exist in weather stations and require high-resolution sensors (Pereira et al., 2013). This method (Kohler & Parmele) is based on the modification of the psychrometric coefficient and of the empirical function of the wind. The method uses an anemometer at height of 4 m; in this study, the anemometer is installed at height of 2 m above the soil, requiring the multiplication by the coefficient 1.15.

Methods of Priestley & Taylor (1972) and Stewart & Rouse (1976)

The method of Penman (1948) comprises two terms, diabatic and adiabatic. Priestley & Taylor (1972) eliminated the adiabatic term (aerodynamic) and corrected the diabatic term with a coefficient, $\alpha = 1.26$ (Pereira et al., 2013).

Stewart & Rouse (1976) simplified the estimate of the net radiation (R_n) of the model of Priestley & Taylor (1972) with a linear regression from data of global solar irradiance, whose method was tested in Canada, in a shallow lake.

Methods of Linacre (1993) and Camargo et al. (1999)

The utilization of empirical relationships of net radiation and the evaporating power of the air, which showed satisfactory performance in various climates, are the basis of this methodology of Linacre (1993), in which the author substituted the aerodynamic function of the wind by $2.5U_2$.

Camargo et al. (1999) aimed to simplify the estimation of reference evapotranspiration (ET_o) and proposed the effective temperature ($T_{ef} = 1.08t_{max} - 0.36t_{min}$); thus, the estimated ET_o will be considered as equal to the evaporation. Camargo & Camargo (2000) pointed out that in a humid area the 20 m² tank with buffer area presents optimal data of ET_o.

The following variables were analyzed: residual errors, the difference between estimated and observed values, efficiency and the characterization of the prediction between overestimation and underestimation. Hence, the following statistical parameters were used: RMSE – root-mean-square error; CRM – coefficient of residual mass; ME – maximum error; BIAS – mean difference; NSE – Nash-Sutcliffe efficiency; R² – coefficient of determination; D – coefficient of agreement; C – coefficient of performance (C = RD) (Camargo & Sentelhas, 1997; Gupta et al., 2009).

Table 1. Description of the utilized meteorological methods and sensors

Reference	Equation for daily evaporation (mm d ⁻¹)	
Penman (1948)	$EPM = \frac{S}{S + \gamma} \frac{R_n}{2.45} + \frac{\gamma}{S + \gamma} E_{ap} \quad E_{ap} = 2.62(1.0 + 0.526U_2)(e_s - e_a)$	
Kohler & Parmele (1967)	$EKP = \frac{S}{S + \gamma_L} \frac{R_{nk}}{2.45} + \frac{\gamma_L}{S + \gamma_L} E_{ak} \quad E_{ak} = (1.36 + 0.0110U_4)(e_s - e_a)$	
Linacre (1993)	$ELN = 0.015 + (0.00042t_a) + (10^{-6} Z)[(0.8 Q_g) - 40 + 2.5 F U_2 (t_a - t_d)]$	
Stewart & Rouse (1976)	$ESR = \frac{S}{S + \gamma} (0.4755 + 0.3773 R_s)$	
Priestley & Taylor (1972)	$EPT = \alpha \frac{S}{S + \gamma} \frac{(R_n)}{2.45} \quad \alpha = 1.26$	
Camargo et al. (1999)	$ECM = 0.01 \frac{R_A}{2.45} (1.08t_{max} - 0.36t_{min})$	
Meteorological variable	Equation and details	Sensors
t_a – mean air temperature (°C)	$t_a = 0.5 (t_{max} + t_{min})$ t_{max} – maximum air temperature (°C) t_{min} – minimum air temperature (°C)	
e_s – water vapor saturation pressure (kPa)	$e_s = 0.6108 * 10^{\frac{7.5t_a}{237.3+t_a}}$ $S = (4098 e_s) / [(t_a + 237.3)^2]$ S – slope of the curve of water vapor pressure versus temperature (kPa °C ⁻¹)	Thermometer of maximum (mercury in glass) and of minimum (alcohol in glass) and Hydrograph, with human hair bundle, installed in a conventional meteorological shelter 2 m from the surface
e_a – actual water vapor pressure in the atmosphere (kPa)	$RH_{mean} = (RH_{max} + RH_{min}) / 2$ RH_{mean} – mean relative air humidity (%) RH_{max} – maximum relative air humidity (%) observed between 9.15 and 21 h RH_{min} – minimum relative air humidity (%) observed between 9.15 and 21 h $e_a = (e_s RH_{mean}) / 100$	
T_d – dewpoint temperature (°C)	$T_d = \left(237.3 \ln \frac{e_a}{0.6108} \right) / \left(17.27 - \ln \frac{e_a}{0.6108} \right)$	
R_s – global solar irradiance (MJ m ⁻² d ⁻¹)	$R_s = \left(0.25 + 0.50 \frac{n}{N} \right) R_A$ n – insolation (h) N = insolation (theoretical value) hours - reference FAO56 R_A = extraterrestrial solar irradiance (MJ m ⁻² d ⁻¹) - reference FAO56	
Q_g – global solar irradiance (W m ⁻²)	$Q_g = 11.6 R_s$	Campbell-Stokes Heliograph
R_n – net radiation on the surface (MJ m ⁻² d ⁻¹)	$R_n = [R_s(1 - \alpha)] - \left[(\sigma T_a^4)(0.34 - 0.14\sqrt{e_a})(0.9 \frac{n}{N} + 0.1) \right]$ $\alpha = 7\%$ - albedo of the water $\sigma = 4.903 \times 10^{-9}$ (MJ m ⁻² d ⁻¹ K ⁻⁴) – constant of Stefan-Boltzmann T_a = air temperature at 2.0 m from the surface (Kelvin)	
	$R_{nk} = [R_s(1 - \alpha)] - \left[(\sigma T_a^4)(0.34 - 0.14\sqrt{e_a}) \right]$ R_{nk} – net radiation on the liquid surface (MJ m ⁻² d ⁻¹) for the method of Kohler & Parmele	
U_4 – wind speed at 4 m (m s ⁻¹)	$U_4 = 1.15 U_2$ U_2 = wind speed (m s ⁻¹)	Three-cup anemometer at 2.0 m
γ – psychrometric coeff.	$\gamma = 0.0672 - (7 * 10^{-6} z) = 0.062 \text{ kPa } ^\circ\text{C}^{-1}$	
γ_L – modified psychrometric coeff. (kPa °C ⁻¹)	$\gamma_L = \gamma + \left(\frac{4\epsilon\sigma T_a^3}{0.136 + (0.095 U_4)} \right)$ $\epsilon = 0.92$ – emissivity of the surface	z = 733 m (local altitude)
F – factor of correction	$F = 1 - (8.7 * 10^{-5} z)$	


RESULTS AND DISCUSSION

The monthly accumulations of rainfall and evaporation in the 20 m² tank are shown in Figure 1. The t_a and R_s are also indicated during the months. The mean annual E_{20} was equal to 4.0 mm d⁻¹. Allen et al. (1998) cite that, in a humid tropical climate with mean temperature close to 20 °C, the mean ETo remains between 3 and 5 mm d⁻¹. The equation of Penman-Monteith is considered as the standard method to estimate ETo (Pereira et al., 2015). Values of ETo become close to E_{20} as reported by Camargo & Camargo (2000). The monthly means during the entire period (2003-2014) did not exceed these values.

In Figure 1, the lowest E_{20} rates are observed in June (minimum accumulated value was 57 mm in June/2013)

due to the lower availability of R_s for the net radiation on the liquid surface. Hence, June is the month with the lowest mean of R_s (13 MJ (m² d⁻¹)), which, along with a RH of 72%, has a mean E_{20} of 72 mm month⁻¹. The peaks of R_s that occur in the summer months, November and February, show a monthly mean R_s of 21 MJ (m² d⁻¹), doubling E_{20} to 144 mm month⁻¹. The highest monthly mean of R_s (26 MJ (m² d⁻¹)) was observed in January 2014, which showed the second highest accumulated value of E_{20} (184 mm), due to an anomalous dry spell. The maximum accumulation of E_{20} was 196 mm in October 2014; this month had R_s (24 MJ (m² d⁻¹)) lower than that of January/2014, but with lower RH (54%).

The highest accumulations of rainfall occurred in December, January and February, characterizing a humid,

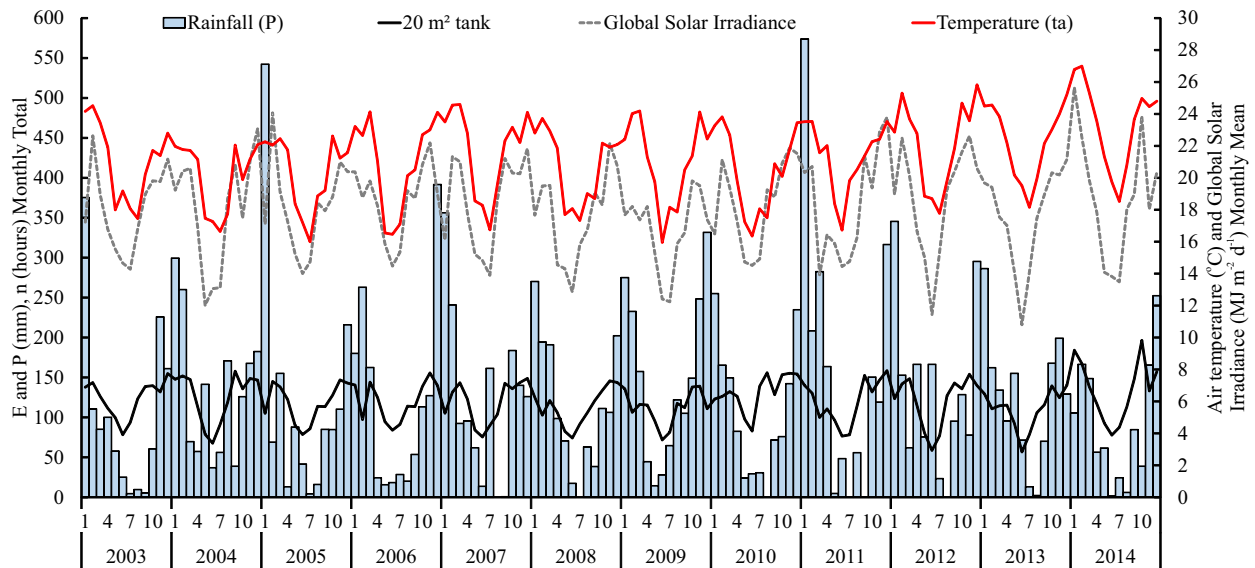

Mean R_s observed in the months is shown in $\text{MJ m}^{-2} \text{d}^{-1}$. Mean air temperature ($^{\circ}\text{C}$) is also indicated

Figure 1. Monthly accumulations, in millimeters, of evaporation (E) in the 20-m² tank and rainfall (P) and air temperature and global solar irradiance

rainy summer, while the first month of the year had the lowest n (167 h month⁻¹), resulting, in general, in R_s lower ($19 \text{ MJ (m}^2 \text{ d)}^{-1}$) than that in December and February. On the other hand, August exhibits, in general, peaks of insolation with 263 h month⁻¹, and the lowest rates of RH, with 64%, indicate the dry winter of the region, with mean R_s of $19 \text{ MJ (m}^2 \text{ d)}^{-1}$. With the decrease in nebulosity, mean R_s equal to that of November and for being the third month of the summer, February has the highest t_a ($24.3 \text{ }^{\circ}\text{C}$).

Each year was divided into two periods, dry and rainy. The rainy period comprehends the months of October to December and January to March. The dry period refers to the months of April to September. The lowest E_{20} was equal to 1325 mm in 2013 and the highest one to 1613 mm in 2014, a difference of almost 300 mm between both years. The mean E_{20} was $1446 \text{ mm year}^{-1}$. The mean annual relationship between rainfall and E_{20} was equal to 1.0 during the analyzed period. In 2011, due to the excess of rainfall, especially in the months of January, March and December, this relationship increased to 1.3; two years later, with the dry period in the region of São Paulo, in 2014, this relationship reached the lowest value (0.7).

In some months with low rainfall in 2014, the atmospheric demand for water vapor increased, intensifying evaporation,

due to the inexistence of buffer area around the 20 m² tank. Thus, the energy balance above the tank is no longer only vertical (Oasis Evaporation), a fact that is not taken into account by the models. Table 2 shows statistical indices for the evaluation of the models.

Figure 2 shows the comparison between E_{20} and modeled values separated as dry and rainy periods; the index c is also indicated. Figure 3 shows the same comparison for the period

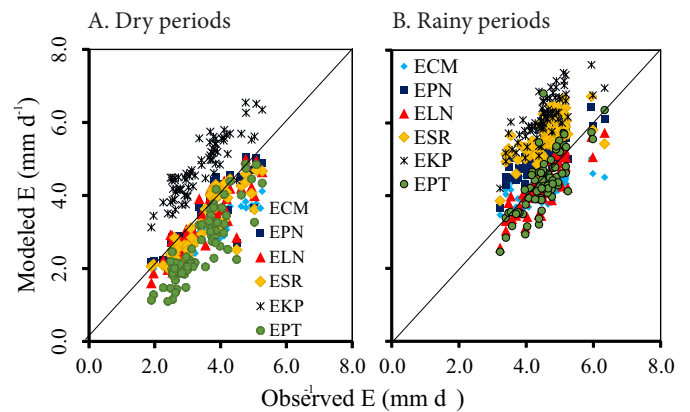



Figure 2. Comparison between E_{20} and evaporation estimated by the models for: (A) dry periods; (B) rainy periods; the index c for each method is indicated

Table 2. Statistical indices for the evaluation of the models of open-water evaporation compared with data observed in a 20 m² tank

Statistic	Data set	E_{CM}	E_{PN}	E_{LN}	E_{SR}	E_{KP}	E_{PT}
RMSE (0)	Dry/Rainy	0.72/0.57	0.39/0.77	0.44/0.43	0.55/1.16	1.42/1.67	0.90/0.55
	2003-2014	0.65	0.61	0.44	0.91	1.55	0.74
CRM (0)	Dry/Rainy	0.18/0.06	0.03/-0.15	0.06/0.05	0.10/-0.23	-0.40/-0.36	0.22/0.03
	2003-2014	0.11	-0.07	0.06	-0.09	-0.38	0.11
ME (0)	Dry/Rainy	2.00/1.83	1.78/1.68	1.63/1.02	1.97/2.11	2.22/2.49	2.24/2.30
	2003-2014	2.00	1.78	1.63	2.11	2.49	2.30
BIAS (0)	Dry/Rainy	-0.61/-0.29	-0.11/0.67	-0.22/-0.22	-0.32/1.05	1.37/1.62	-0.76/-0.15
	2003-2014	-0.45	0.28	-0.22	0.36	1.49	-0.46
NSE (>0)	Dry/Rainy	0.09/0.02	0.75/-1.11	0.67/0.45	0.50/-3.04	-2.61/-7.73	-0.38/0.09
	2003-2014	0.46	0.51	0.76	-0.10	-2.17	0.20

E_{CM} – Camargo et al. (1999); E_{PN} – Penman (1948); E_{LN} – Linacre (1993); E_{SR} – Stewart & Rouse (1976); E_{KP} – Kohler & Parmele (1967); E_{PT} Priestley & Taylor (1972); For the statistics, the expected values are between parentheses

RMSE - Root mean square error; CRM - coefficient of residual mass; ME - Maximum error; BIAS - Mean difference, NSE - Nash-Sutcliffe efficiency

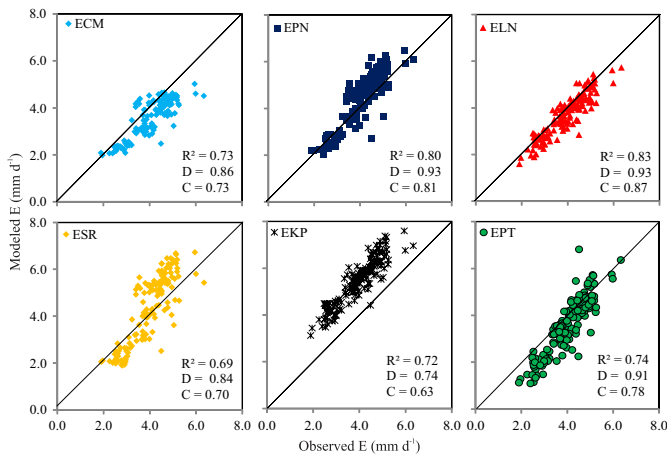

The coefficients of correlation (R^2); agreement (D) and performance (C) are also described Figure 3. Comparison between E_{20} and estimates for the entire period of 2003-2014

from 2003 to 2014. The evaporation estimation quality of the methods is evaluated by the coefficient of determination (R^2) and the accuracy is represented by the coefficient of agreement (D), both presented in Figure 3.

E_{PN} has the best indices for the dry period. The indices CRM and BIAS suggest that, during the dry period, only E_{KP} overestimated, while the other methods underestimated E . E_{PN} and E_{SR} during the dry period exhibit acceptable results; however, in the rainy period, the estimates of these methods showed the lowest C values. In this humid period, E_{PN} and E_{SR} showed high evaporation, above the observed value. E_{PT} shows the best accuracy during the rainy period; E_{LN} has values closer to 1 in the rainy period and in the entire period. Except for E_{LN} and E_{PT} , the other methods showed C coefficient lower than 0.7 during the rainy period.

The methods that exhibited similar behavior under both analyzed conditions (rainy and dry) were: Camargo et al. (1999) and Linacre (1993), with underestimation, and Kohler & Parmele (1967), with overestimation. When the statistical index NSE has negative value, it is advisable not to use the model; instead, the observed mean should be used as estimate (Gupta et al., 2009).

Ultimately, the estimation quality of the methods is evaluated by the coefficient (C) presented in Table 3. The best statistical fit and accuracy are obtained by the methods E_{LN} and E_{PN} . E_{LN} has the best accuracy, demonstrated by the indices RMSE and D.

In Piracicaba, SP, and Jaboticabal, SP, E_{LN} showed good results with the 20 m² tank with the coefficient C varying from very good to optimal on the monthly scale (Oliveira, 2009). For Boqueirão, PB, and Patos, PB, it showed very good and good C factor, respectively (Leitão et al., 2007). Pereira et

Table 3. Performance (C) of the analyzed methods of evaporation estimation

Method	Performance during the entire period	Method	Performance during the entire period
E_{CM}	Very good (0.76 to 0.85)	E_{SR}	Good (0.66 to 0.75)
E_{PN}	Very good (0.76 to 0.85)	E_{KP}	Medium (0.61 to 0.65)
E_{LN}	Optimal (> 0.85)	E_{PT}	Very good (0.76 to 0.85)

E_{CM} – Camargo et al. (1999); E_{PN} – Penman (1948); E_{LN} – Linacre (1993); E_{SR} – Stewart & Rouse (1976); E_{KP} – Kohler & Parmele (1967); E_{PT} – Priestley & Taylor (1972)

al. (2009) concluded that E_{LN} overestimated the evaporation for the reservoir of Sobradinho in comparison to the measurements in the Class A pan corrected by the coefficient of 0.6. However, in this study, Q_g was not estimated with data of insolation, making the accuracy of the model worse.

When Penman (1948) developed the method with lysimetric and evaporimetric data, he did not have a net radiometer; thus, he elaborated an equation that is adopted by FAO 56 and is the basis to estimate net radiation (Rn) of the estimates of E_{PN} , E_{KP} and E_{PT} . Under the conditions of the present study, the evaporation measured in the 20 m² tank indicates that the equation used in the models overestimates the value of Rn.

In the simplification made by Priestley & Taylor (1972), the adiabatic term was suppressed and incorporated to the diabatic term through the multiplication by a coefficient $\alpha = 1.26$; thus, a good estimation of evaporation depends even more on the correct estimation of Rn. Oliveira (2009) concluded that E_{PT} showed results consistent with those of the 20 m² tank in Piracicaba-SP; however, in this study the author measured Rn above a lake.

Stewart & Rouse (1976) utilized the approach of Priestley & Taylor (1972) modifying the form of estimating Rn, by using the equation $0.38+0.30R_s$, which was developed in temperate climate and does not show good results for the estimation of evaporation in the tropical climate.

The form of determination of net radiation through the method of Kohler & Parmele (1967) produced values underestimated by, on average, 2.38 MJ m⁻² d⁻¹ (~1.0 mm) during the entire period, in comparison to those estimated by the method of Penman (1948). Thus, the estimation of the method showed unsatisfactory performance.

The difference between the height of the anemometer (2.0 m) and the recommendation of the authors (4.0 m) does not influence the estimation of evaporation, due to the correction performed by the logarithmic profile. According to Woodhead (1972), this occurs because the uncertainties in U_4 measurements alter in at most 5% the calculated values of evaporation.

Local data, such as the aerodynamic resistance of the surface or the empirical function of the wind expressed as a linear function $f(u)$, are rare. Pereira et al. (2013) point out that these functions must be determined locally to improve the efficiency of the method. Thus, given the various and increasing options found in the literature to estimate net radiation and establish $f(u)$, the model proposed by Linacre (1993) simplifies these choices and does not require specific measurements.

If there are no data of insolation or R_s and UR, the method of Camargo et al. (1999), based only on the effective temperature, has a very good performance and should be used in the estimation of evaporation of the 20 m² tank. Between competing hypotheses, the one with lowest number of assumptions must be selected (Ockham's razor). Temperature and rainfall are the variables most easily measured in the stations and with higher reliabilities. Therefore, the expansion of platforms of environmental data collection (ANA, INMET, CPRM and INPE) in Brazil increases the possibility of application of this method.

CONCLUSIONS

1. The method of Linacre (1993) is recommended to estimate open-water evaporation.
2. In the rainy period, the method of Priestley & Taylor (1972) provides evaporation estimates as good as those of the method of Linacre (1993).
3. The method of Camargo et al. (1999) is a simple alternative for the estimation of evaporation from the 20 m² tank. The original method of Penman (1948) overestimates it.
4. The mean annual relationship between rainfall and the evaporation observed in the 20 m² tank is unitary, varying between 0.7 for a dry year (2014) and 1.3 for a rainy year (2011).

LITERATURE CITED

- Allen, R. G.; Pereira, L. S.; Raes, D.; Smith, M. Crop evapotranspiration: Guidelines for computing crop water requirements. Rome: FAO, 1998. 174p. Irrigation and drainage paper 56
- Camargo, A. P. D.; Camargo, M. B. P. D. Uma revisão analítica da evapotranspiração potencial. *Bragantia*, v.59, p.125-137, 2000. <http://dx.doi.org/10.1590/S0006-87052000000200002>
- Camargo, A. P.; Marin, F. R.; Sentelhas, P. C.; Picini, A. G. Ajuste da equação de Thornthwaite para estimar a evapotranspiração potencial em climas áridos e superúmidos, com base na amplitude térmica diária. *Revista Brasileira de Agrometeorologia*, v.7, p.252-257, 1999.
- Camargo, A. P.; Sentelhas, P. C. Avaliação do desempenho de diferentes métodos de estimativas da evapotranspiração potencial no Estado de São Paulo, Brasil. *Revista Brasileira de Agrometeorologia*, v.5, p.89-97, 1997.
- Collischonn, B.; Tucci, C. E. M. Relações regionais entre precipitação e evapotranspiração mensais. *Revista Brasileira de Recursos Hídricos*, v.19, p.205-214, 2014. <http://dx.doi.org/10.21168/rbrh.v19n3.p205-2014>
- Coutinho, R. M.; Kraenkel, R. A.; Prado, P. I. Catastrophic regime shift in water reservoirs and São Paulo water supply crisis. *PLoS ONE*, v.10, p.e0138278, 2015. <http://dx.doi.org/10.1371/journal.pone.0138278>
- Getirana, A. C. V. Extreme water deficit in Brazil detected from space. *Journal of Hydrometeorology*, v.17, p.591-599, 2015. <http://dx.doi.org/10.1175/JHM-D-15-0096.1>
- Gupta, H. V.; Kling, H.; Yilmaz, K. K.; Martinez, G. F. Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling. *Journal of Hydrology*, v.377, p.80-91, 2009. <http://dx.doi.org/10.1016/j.jhydrol.2009.08.003>
- Hounam, C. E. Comparison between pan and lake evaporation. Geneva: World Meteorological Organization, 1973. 52p.
- Kohler, M. A.; Parmele, L. H. Generalized estimates of free-water evaporation. *Water Resources Research*, v.3, p.997-1005, 1967. <http://dx.doi.org/10.1029/WR003i004p00997>
- Leão, R. A. de O.; Soares, A. A.; Teixeira, A. dos S.; Silva, D. D. Estimation of evaporation in the Banabuiú dam, in the state of Ceará, Brazil, by different combined methods, derived from the Penman equation. *Engenharia Agrícola*, v.33, p.129-144, 2013. <http://dx.doi.org/10.1590/S0100-69162013000100014>
- Leitão, M. de M. V. B. R.; Oliveira, G. M. de; Leitão, T. J. V. Avaliação do desempenho de diferentes métodos de estimativa da evaporação para duas regiões da Paraíba. *Revista Brasileira de Engenharia Agrícola e Ambiental*, v.11, p.585-593, 2007. <http://dx.doi.org/10.1590/S1415-43662007000600006>
- Linacre, E. T. Data-sparse estimation of lake evaporation using a simplified Penman equation. *Agricultural and Forest Meteorology*, v.64, p.237-256, 1993. [http://dx.doi.org/10.1016/0168-1923\(93\)90031-C](http://dx.doi.org/10.1016/0168-1923(93)90031-C)
- Oliveira, G. X. S. Relações entre medidas de evaporação de superfícies de água livre por evaporímetros e estimativas por métodos meteorológicos em duas regiões do Estado de São Paulo. Piracicaba: ESALQ/USP, 2009. 108p. Tese Doutorado. <http://dx.doi.org/10.11606/t.11.2009.tde-04082009-111344>
- Penman, H. L. Natural evaporation from open water, bare soil and grass. *Proceedings of the Royal Society A*, v.193, p.120-145, 1948. <http://dx.doi.org/10.1098/rspa.1948.0037>
- Pereira, A. R.; Villa Nova, N. A.; Sedyama, G. C. Evapotranspiração. Campinas: Fundag, 2013. 318p.
- Pereira, L. S.; Allen, R. G.; Smith, M.; Raes, D. Crop evapotranspiration estimation with FAO56: Past and future. *Agricultural Water Management*, v.147, p.4-20, 2015. <http://dx.doi.org/10.1016/j.agwat.2014.07.031>
- Pereira, S. B.; Pruski, F. F.; Silva, D. D. da; Ramos, M. M. Evaporação líquida no lago de Sobradinho e impactos no escoamento devido à construção do reservatório. *Revista Brasileira de Engenharia Agrícola e Ambiental*, v.13, p.346-352, 2009. <http://dx.doi.org/10.1590/S1415-43662009000300018>
- Porto, R. L.; Porto, M. F. A.; Palermo, M. A. ressurreição do volume morto do Sistema Cantareira na Quaresma. *Revista DAE*, v.197, p.18-25, 2014. <http://dx.doi.org/10.4322/dae.2014.131>
- Priestley, C. H. B.; Taylor, R. J. On the assessment of surface heat flux and evaporation using large-scale parameters. *Monthly Weather Review*, v.100, p.81-92, 1972. [http://dx.doi.org/10.1175/1520-0493\(1972\)100%3C0081:OTAOSH%3E2.3.CO;2](http://dx.doi.org/10.1175/1520-0493(1972)100%3C0081:OTAOSH%3E2.3.CO;2)
- Stewart, R. B.; Rouse, W. R. A simple method for determining the evaporation from shallow lakes and ponds. *Water Resources Research*, v.12, p.623-628, 1976. <http://dx.doi.org/10.1029/WR012i004p00623>
- Trenberth, K. E.; Fasullo, J. T.; Mackaro, J. Atmospheric moisture transports from ocean to land and global energy flows in reanalyses. *Journal of Climate*, v.24, p.4907-4924, 2011. <http://dx.doi.org/10.1175/2011JCLI4171.1>
- Woodhead, T. Mapping potential evaporation for tropical East Africa: The accuracy of Penman estimates derived from indirect assessments of radiation and windspeed. In: Symposium on World Water Balance, 1972, Madrid. Proceedings... Madrid: WMO, 1972. p.232-241.